



**DynaSub™**



**Gloss / Brushed (STP - 100)**

Surface / Engraving Colour

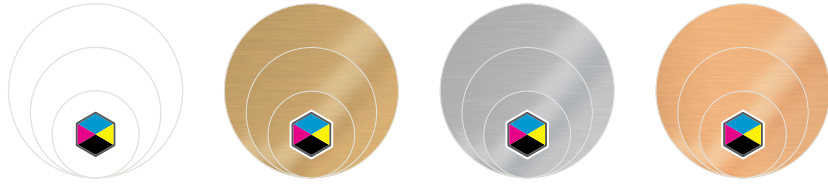

Gloss White / Silver <b>RD01000WS</b> 1" x .018"	Brushed Gold / Silver <b>RD01000HGS</b> 1" x .018"	Brushed Silver / Silver <b>RD01000HSS</b> 1" x .018"	Brushed Bronze / Silver <b>RD01000ZS</b> 1" x .018"
<b>RD01500WS</b> 1½" x .018"	<b>RD01500HGS</b> 1½" x .018"	<b>RD01500HSS</b> 1½" x .018"	<b>RD01500ZS</b> 1½" x .018"
<b>RD02000WS</b> 2" x .018"	<b>RD02000HGS</b> 2" x .018"	<b>RD02000HSS</b> 2" x .018"	<b>RD02000ZS</b> 2" x .018"

**Gloss / Brushed (STP - 100 or \*STP - 50)**

**DynaSub™**

Surface / Engraving Colour



Gloss White / Silver <b>SH00001WS</b> 1½" x 1¼" x .020"	Brushed Gold / Silver <b>SH00001HGS</b> 1½" x 1¼" x .020"	Brushed Silver / Silver <b>SH00001HSS</b> 1½" x 1¼" x .020"	Brushed Bronze / Silver <b>SH00001ZS</b> 1½" x 1¼" x .020"
---	---	---	--




Gloss White / Silver <b>SH00006WS*</b> 3½" x 3¾" x .020"	Brushed Gold / Silver <b>SH00006HGS*</b> 3½" x 3¾" x .020"	Brushed Silver / Silver <b>SH00006HSS*</b> 3½" x 3¾" x .020"
--	--	--



Gloss White / Silver  
**SH00007WS\***  
5" x 5¾" x .020"



**Transfer Paper for EPSON Printers**  
**SP08511E** **SP08514E**  
8½" x 11" 8½" x 14"  
STP - 3 STP - 3



**TESA® Sublimation Heat Tape**  
**HD09300**  
½" x 66m / 72yds  
STP - 3



**Transfer Paper for RICOH Printers**  
**SP08511R** **SP08514R** **SP01117R**  
8½" x 11" 8½" x 14" 11" x 17"  
STP - 3 STP - 3 STP - 3

**BENEFITS**

- Discs & shields for sublimation, fibre laser or rotary engraving
- Brilliant & rich colour reproduction
- Premium Quality
- Won't peel off or crack like other printing processes
- Not compatible with CO2 laser engravers

**APPLICATIONS**

Medals, holders, trophy & award plates...

**SPECIFICATIONS**

Finish	Gloss or Brushed
Composition	Aluminum
Engraving Depth	.008"
Full Sheet	-
Half Sheet	-
Quarter Sheet	-
Other Size(s)	-

**CAPABILITIES**

Interior	■
Exterior	-
Shear	-
Saw	-
Screen Print	■
Hot Stamp	■
Heat bending	-
Scratch resistant	■
Flexible	-
Break resistant	■
UV resistant	-
Min. temp.	-40°C (-40°F)
Max. temp.	230°C (450°F)

**TECH TIPS**

Sublimation settings:  
385°F (400°C) for 50 seconds  
Can be engraved with your fibre laser machine.

Call 1.800.387.7439  
or visit [www.engraversdepot.ca](http://www.engraversdepot.ca)