


Gloss

Surface / Engraving Colour

| | |
|--------|----------------------|
| Gold / | 18407 (.020") |
| Gold | 18435 (.050") |

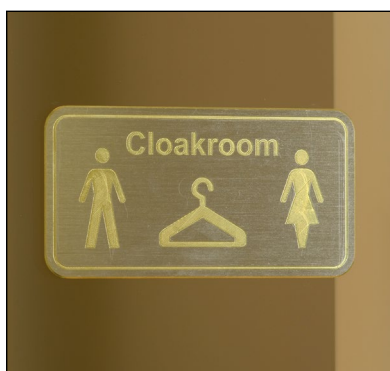

Gravoxide

Designed to blacken fine engraving on Gravometal™.

| Description | Part Number |
|-----------------------------|--------------|
| Gravoxide - 3oz Bottle | 32821 |
| Application Swabs - 12 Pack | 32820 |

Satin

Surface / Engraving Colour

| | |
|--------|----------------------|
| Gold / | 18423 (.025") |
| Gold | 18438 (.050") |
| | 18441 (1/16") |

| | |
|----------|----------------------|
| Silver / | 18429 (.025") |
| Gold | |

| | |
|---------------|----------------------|
| Gold Bronze / | 83541 (.020") |
| Gold | |



BENEFITS

- Diamond, rotary and burnish engraving
- Pre-polished and lacquered
- High quality brass varnish finish, ideal for indoor plates

APPLICATIONS

Interior signage, award plates, ornamental plates...

SPECIFICATIONS

| | |
|-----------------|--------------------|
| Finish | Gloss or Satin |
| Composition | Brass |
| Engraving Depth | .004" / .012" |
| Full Sheet | 12" x 48" |
| Half Sheet | 12" x 24" (add -H) |
| Quarter Sheet | 12" x 12" (add -Q) |
| Other Size(s) | - |

CAPABILITIES

| | |
|-------------------|---------------|
| Interior | ■ |
| Exterior | - |
| Shear | ■ |
| Saw | ■ |
| Screen Print | ■ |
| Hot Stamp | - |
| Heat bending | - |
| Scratch resistant | - |
| Flexible | - |
| Break resistant | ■ |
| UV resistant | - |
| Min. temp. | -40°C (-40°F) |
| Max. temp. | 200°C (392°F) |

TECH TIPS

You can add a protective varnish after engraving for outdoor use.

Apply clear lacquer after engraving to avoid tarnishing.

Use Gravoxide or paint fill for contrasting letter colour.